


**Type 11-98 (900)
Yellow**

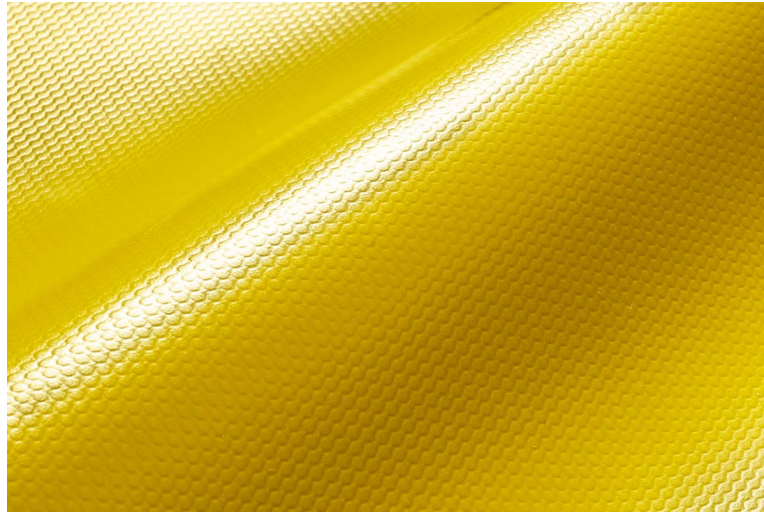

TECHNICAL SPECIFICATIONS

Fabric	DIN EN ISO 2060/ 2076	Warp Weft	Polyester (PES) 1100 dtex Polyester (PES) 1670 dtex
Weave	DIN ISO 3572		P 2/2
Tensile strength	DIN EN ISO 1421/V1	Warp Weft	4300 N/50mm 4000 N/50mm
Tear strength	DIN 53363	Warp Weft	500 N 500 N
Finish			Both sides lacquered high gloss
Color			Yellow
Thickness	DIN EN ISO 2286-3		1,15 mm
Total weight	DIN EN ISO 2286-2		900 g/m ²
Adhesion	PA 09.03 (intern)		20 N/5 cm
Cold resistance	DIN EN 1876-1		-40 °C
Heat resistance	PA 07.04 (intern)		+70 °C
Light fastness	DIN EN ISO 105 B02		> 6
Crack resistance	DIN 533 59 A ISO 7854 B		No cracking after 100.000 flexes
Burning behaviour	ISO 3795		Burning speed < 100 mm/min
Field of application			complies with EN 12641-2, materials