



## FabLink®-EC50.8.PR%11

### **Meat Applications**

Dressing Lines, Trim Lines, Elevator, Metal Detector

### **Poultry Applications**

Cut-up Lines, Debonning Lines, Chiller Discharge, Rehang / Bird Accumulation, *Freezing Lines*, Elevators

### **Sea Food Applications**

Draining, Elevator

### **Snack Food Applications**

Can Draining

### **Fruits and Vegetables Applications**

Prewashing / Rinsing, Draining, Peeling, Elevator

# FabLink® EC50.8.PR%11

Pitch	50.8 mm / 2 inch
Belt surface	Open, Mesh Top Surface
Minimum width	200 mm / 7.87 inch
Open Area (%)	11% (Biggest opening 1.2 x 12mm)
Cleat	Yes ( T25, T50, T75, T100, T150, TNC50, TNC100, TC75, TC100, TC150, TCC75, TCC100, TCC150, TCCH100)
Sidewall	Yes ( h=25 mm, h=50 mm, h=75 mm, h=100 mm )
Pin	Ø 7 mm / 0,276 inch – Self lock
Approved	FDA and EU
Curve	No
Color	Additional colors available
Cleanability	Excellent
Belt thickness	16 mm / 0.630 inch



## Product Features and Functional Benefits

- Unique sprocket engagement - precise indexing, easy cleaning.
- Different openings to optimize performance in cooling and draining applications.
- Easy to clean reduces downtime for cleaning time 70%.
- Unique sprocket engagement - higher Productload and longer conveyors.
- Reduces bacteria growth.

## Available Moulded Module Sizes

200 mm / 7.87 inch module


## Technical Information

BELT MATERIAL	BELT STRENGTH				TEMPERATURE		BELT WEIGHT Kg/m <sup>2</sup> / lb/ft <sup>2</sup>
	Straight		Curve		°C / ° F (min.)	°C / ° F (max.)	
	N/mm	lb/ft	N/mm	lb/ft			
PP (Polypropylene)	19800	1356	-	-	+5 / +41	+90 / +194	7,8 / 1.60
PE (Polyethylene)	-	-	-	-	-	-	-
Acetal	-	-	-	-	-	-	-

Belt strength and temperature values are maximum on the table


## Standard Belt Widths

WIDTH (W)				BELT WIDTH TOLERANCE (max.)
PP-PE		POM		
mm	inch	mm	inch	
200,0	7.87	200,0	7.87	± 1 mm
300,0	11.81	300,0	11.81	± 2 mm
400,0	15.75	400,0	15.75	± 2 mm
500,0	19.69	500,0	19.69	± 2 mm
600,0	23.62	600,0	23.62	± 3 mm
700,0	27.56	700,0	27.56	± 3 mm
800,0	31.50	800,0	31.50	± 3 mm
900,0	35.43	900,0	35.43	± 4 mm
1000,0	39.37	1000,0	39.37	± 4 mm
1100,0	43.31	1100,0	43.31	± 4 mm
1200,0	47.24	1200,0	47.24	± 4 mm
1300,0	51.18	1300,0	51.18	± 5 mm
1400,0	55.11	1400,0	55.11	± 5 mm
1500,0	59.06	1500,0	59.06	± 5 mm

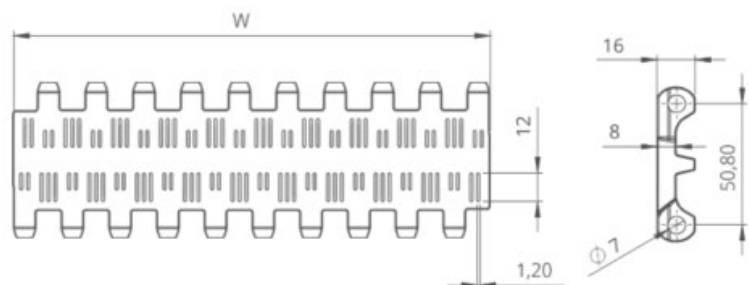

- Standard belt increments 100 mm
  - Non-standard belt increments 20mm
- Please contact with customer service for precise belt measurements

## Sprockets and Technical Specifications

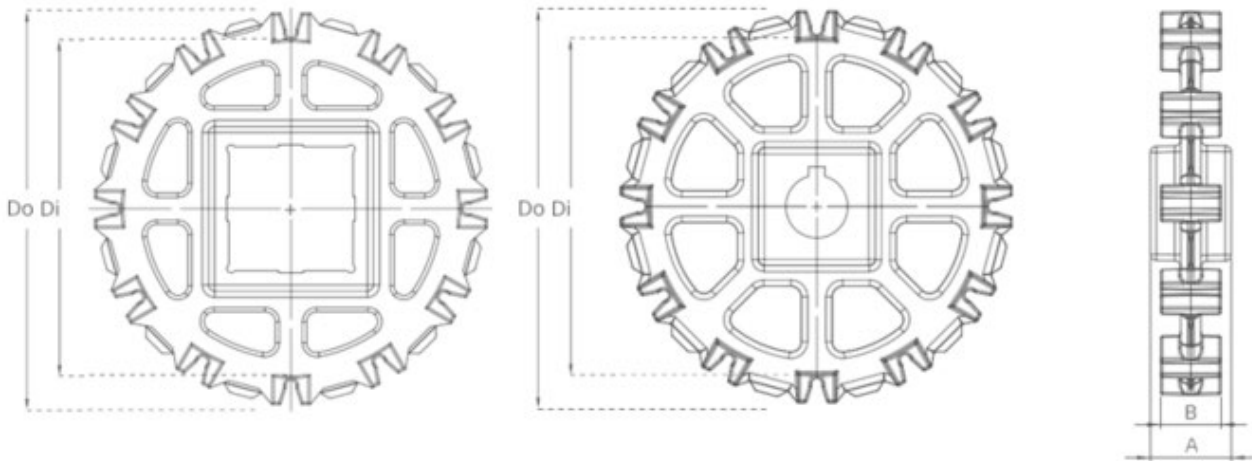


### Standard Sprocket Dimensions

NUMBER OF TEETH	Di mm / inch	Do mm / inch	B mm / inch	A mm / inch	Square Bore (Q) mm / inch	Round Bore (R) mm / inch	PRODUCTCODE	
							Square Type (Q)	Round Type (R)
Z6	73,0 / 2.87	90,0 / 3.54	30 / 1.18	40 / 1.57	40 / 1.5	25-30 / 1-1.25	FL-EC-508SQZ6	FL-EC-508SRZ6
Z8	107,5 / 4.23	124,5 / 4.90	30 / 1.18	40 / 1.57	40 / 1.5	25-30 / 1-1.25	FL-EC-508SQZ8	FL-EC-508SRZ8
Z10	141,5 / 5.57	158,0 / 6.22	30 / 1.18	40 / 1.57	40-60 / 1.5-2.5	25-30 / 1-1.25	FL-EC-508SQZ10	FL-EC-508SRZ10
Z12	175,2 / 6.90	191,2 / 7.53	30 / 1.18	40 / 1.57	40-60 / 1.5-2.5	25-30 / 1-1.25	FL-EC-508SQZ12	FL-EC-508SRZ12

- \* Other sprockets and hub sizes are manufactured upon request
- \* POM (Acetal) and PP (Polypropylene) sprockets are available upon request

\*Machined Split Sprockets are available for each size

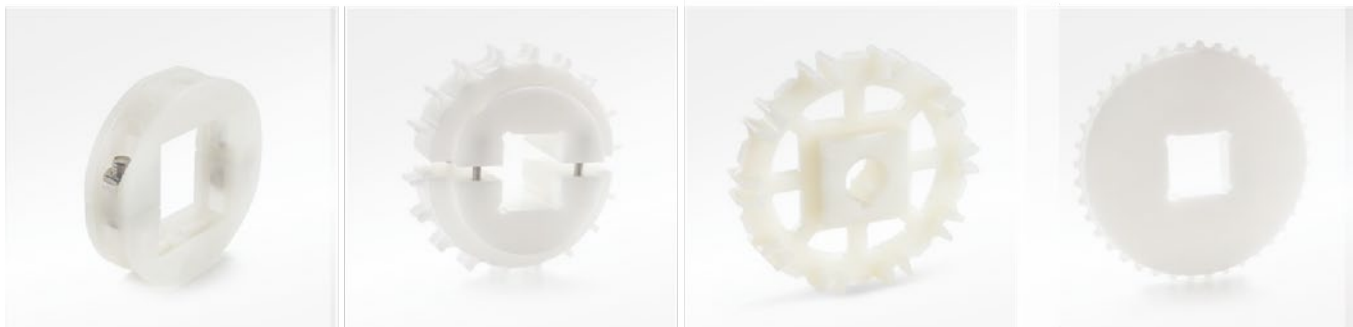


Clamp

Machined Split Sprocket

Moulded Sprocket

Machined Sprocket

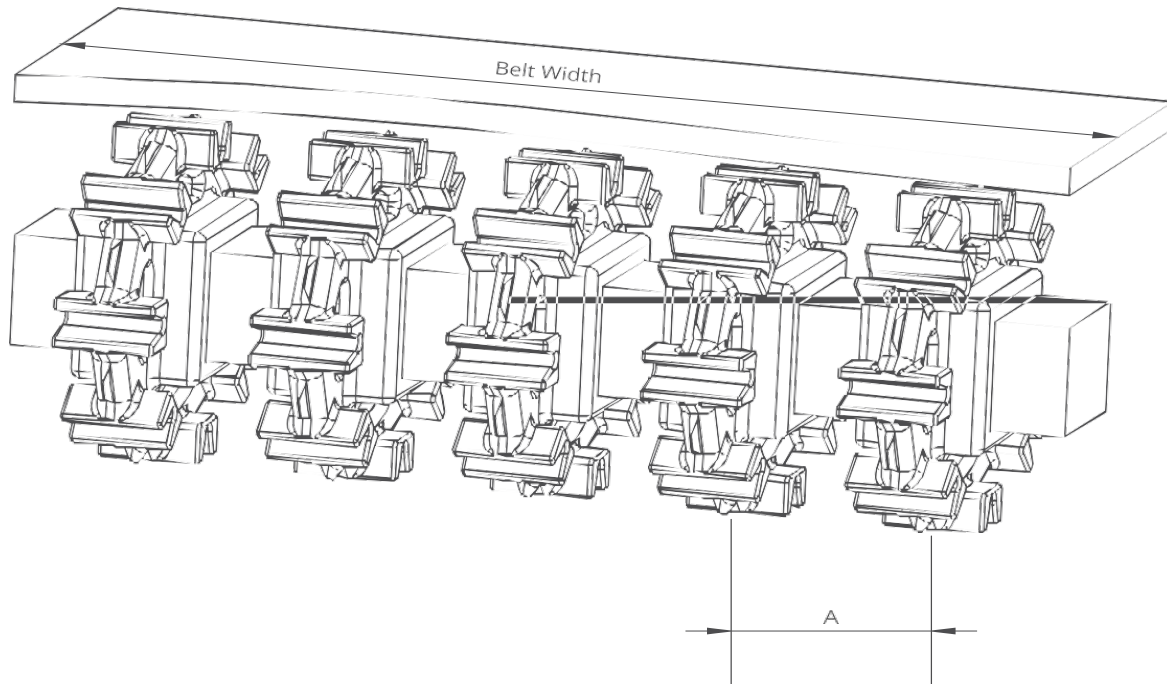

### Sprockets Arrangement

Standard Belt Width		Number of sprockets per shaft		A (mm/inch)	
mm	inch	Drive Shaft	Return Shaft	Min.	Max.
200,0	7.9	2	2	60 / 2.36	150 / 5.9
300,0	11.8	3	2	60 / 2.36	150 / 5.9
400,0	15.7	3	3	60 / 2.36	150 / 5.9
500,0	19.7	4	3	60 / 2.36	150 / 5.9
600,0	23.6	4	3	60 / 2.36	150 / 5.9
700,0	27.6	5	4	60 / 2.36	150 / 5.9
800,0	31.5	6	4	60 / 2.36	150 / 5.9
900,0	35.4	6	5	60 / 2.36	150 / 5.9
1000,0	39.4	7	5	60 / 2.36	150 / 5.9
1100,0	43.3	7	5	60 / 2.36	150 / 5.9
1200,0	47.2	8	6	60 / 2.36	150 / 5.9
1400,0	55.1	9	7	60 / 2.36	150 / 5.9
1600,0	63.0	10	7	60 / 2.36	150 / 5.9
1800,0	70.9	11	8	60 / 2.36	150 / 5.9
2000,0	78.7	12	8	60 / 2.36	150 / 5.9
2200,0	86.6	13	9	60 / 2.36	150 / 5.9
2400,0	94.5	14	10	60 / 2.36	150 / 5.9
2600,0	102.4	15	10	60 / 2.36	150 / 5.9
2800,0	110.2	16	11	60 / 2.36	150 / 5.9
3000,0	118.1	17	12	60 / 2.36	150 / 5.9

Note: Number of sprockets depends on the belt load.